

EPEC 6200 REMOTE ACCESS UNIT

ONE PAGER 6200

Epec 6200 Remote Access Unit offers versatile possibilities for remote access. Epec 6200 has a wide range of communication interfaces and it is wrapped in a slim and leak-proof rugged aluminum housing. Three diagnostic LEDs offer you quick status information.


Together with Epec's IoT Services you'll get the fastest to configure and most reliable IoT system/remote management solution in the market.

In case there is an occasional need for graphical interface in the machine, with Epec 6200 and WebVisu solution you can use for example a smart phone as temporary HMI when the machine is running.



TECHNICAL FEATURES

Processor: 32 bit CPU
Flash memory: 4 or 32 GByte
RAM: 1024 MByte
CAN: 2-6
Ethernet: 2
USB: 1
RS-232: 1
GSM / UMTS / HSPA+/LTE
WLAN
GPS, GLONASS, BeiDou/Compass, Galileo, QZSS
I/O: 5 (3 inputs and 2 outputs or 5 inputs and 0 outputs)
IP class: IP67
Temperature range: -30 ... + 60 °C -22 ... +140 °F
Connectors: 1 x AMP23, 2 x M12, 3 x SMA
CODESYS version: 3.5
Supported communication protocols: CANopen, SAEJ1939, MODBUS, NMEA 2000
3 two-colored diagnostic LED for quick status check and fault detection

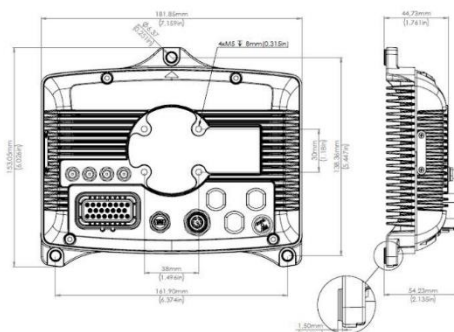

APPROVALS

Symbol / Name	Explanation
CE	This product complies with the requirements set in the CE Standard.
E17	This product is certified with normal automotive (E17) EMC (electromagnetic compatibility) standards.
RoHS2	This product complies with the RoHS directive (The Restriction of the use of certain Hazardous Substances in Electrical and Electronic Equipment).
FCC	Epec 6200 4G / LTE Pending
RCM	This product complies with the ACMA (Australian Communications and Media Authority) regulatory arrangements concerning electromagnetic compatibility and radio equipment.
Radio Equipment Directive	Epec 6000 series units comply with Radio Equipment Directive (2014/53/EU).
EU declaration of conformity	This device is in compliance with Directive 2014/53/EU. For more information, refer to the product's technical manual.

YOUR CHALLENGE, OUR INSPIRATION.

EPEC